
Supervised Learning for Controlled Dynamical System Learning

Ahmed Hefny

Carnegie Mellon University

Carlton Downey

Carnegie Mellon University

Geoffrey J. Gordon

Carnegie Mellon University

Abstract

We develop a framework for reducing the identification of controlled dynamical systems to solving a small set of supervised learning problems. We do this by adapting the two-stage regression framework in [16] to controlled systems, which are more subtle than uncontrolled systems since they require a state representation that tolerates changes in the action policy.

We then use the proposed framework to develop a non-parametric controlled system identification method that approximates the Hilbert-Space Embedding of a PSR (HSE-PSR)[8] using random Fourier features, resulting in significant gains in learning speed. We also propose an iterative procedure for improving model parameters given an initial estimate. We report promising results on multiple experiments.

1 Introduction

Modeling and learning dynamical systems (also known as system identification) is of great importance in numerous applications such as robotics and econometrics. Spectral algorithms offer tractable and statistically consistent methods for system identification as opposed to traditional methods such as EM and MCMC. Spectral algorithms avoid the use of latent variables to represent states. Instead, they use a *predictive* state, defined as the expectation of sufficient statistics (or features) of future observations¹. Initially introduced for linear Gaussian systems [28], these algorithms have been extended to discrete systems [17, 22, 9].

There have been two recent advancements related to spectral algorithms. First, it has been shown that a wide class of

¹There is a class of spectral algorithms that maintains the latent variable view. This is exemplified by tensor decomposition methods[1].

spectral learning algorithms for uncontrolled systems is an instance of a two-stage regression framework [16], where system identification is reduced to solving a set of regression problems. This framework allows for seamless integration of compressing non-linearities, sparsity[31] and on-line learning [29] into system identification. Second, it has been demonstrated that discrete system identification methods can be extended into continuous non-parametric variants while maintaining the tractability and consistency of learning through the concept of Hilbert space embedding of distributions [25, 8].

In controlled dynamical systems the user can affect the system through *actions*. Controlled systems present a variety of challenges not present in uncontrolled systems.

In this work, we extend the two-stage regression framework in [16] to controlled systems, where the user can affect the system through *actions*. An important reason why learning a controlled system is more difficult is that the policy determining the actions can change at test time. To handle this, the representation of the predictive state must be independent of the training policy and therefore must encode a *conditional distribution* of future observations given future actions. This violates a key assumption in [16]; that future observations provide an unbiased estimate of the predictive state. We develop a framework that handles this issue, showing that it encompasses a number of well-known models in the literature.

We use the developed framework to propose RFF-PSR, a scalable method for identifying controlled non-linear partially observable systems. To do so, we examine a successful non-parametric system identification method, namely Hilbert space embedding of predictive state representations (HSE-PSR) [8], through the lens of two-stage regression. We propose and test different improvements resulting in a method with higher computational efficiency and predictive performance. Overall, RFF-PSR attains a number of advantages compared to existing system identification methods that we summarize in Table 1.

In summary, the contributions of this work are as follows:

- We extend the two-stage regression framework of [16] to controlled dynamical systems (Sections 3-4).
- We use the extended formulation to construct RFF-

Method	Actions	Continuous	Non-linear	Partially observable	Scalable [$O(\#\text{samples})$]	Consistent
Non-linear ARX	✓	✓	✓	×	✓	✓
N4SID for Kalman Filter	✓	✓	×	✓	✓	✓
Non-convex optimization (e.g. EM)	✓	✓	✓	✓	✓	×
Gram-Matrix (e.g. HSE-PSR)	✓	✓	✓	✓	×	✓
Spectral PSR/POMDP	✓	×	✓	✓	✓	✓
Reduction to Supervised Learning	×	✓	✓	✓	✓	✓
RFF-PSR	✓	✓	✓	✓	✓	✓

Table 1: Comparison between proposed RFF-PSR and existing system identification methods in terms of the type of systems they can model as well as their computational efficiency and statistical consistency. The table should be interpreted as follows: for each method there exists an instantiation that *simultaneously* satisfies all properties marked with ✓ but there is no instantiation that is guaranteed to satisfy the properties marked with ×.

PSRs, a finite dimensional approximation of HSE-PSRs [8] that is orders of magnitude more computationally efficient (Section 5).

- We provide a means to refine the parameters of a controlled dynamical system and apply it to our proposed RFF-PSR model (Section 5.5).
- We demonstrate the advantages of our proposed method through synthetic and robot simulation experiments (Section 6).

2 Related Work

Developing tractable and consistent algorithms for latent state dynamical systems dates back to spectral subspace identification algorithms for Kalman filters [28]. At their heart, these algorithms represent the state as a prediction of the future observations conditioned on history and future actions and use matrix factorization to obtain a basis for the state.

This notion of the state as a prediction is the basis of *predictive state representations* (PSRs) [23], where the state is represented by the success probabilities of a number of *tests*. A test succeeds if a specified sequence test observations is observed when administering a specified sequence of test actions.

Noting that the state and parameters of a PSR are defined up to a similarity transformation has led to a family of tractable and consistent spectral algorithms for learning PSRs [21, 7, 9]. More recently, Boots et al. [8] proposed a generalization of PSRs in a reproducing kernel Hilbert space (RKHS). This Hilbert space embedding of PSRs (HSE-PSRs) is able to represent systems with continuous observations and actions while still offering a tractable and consistent learning algorithm. HSE-PSRs, however, use a Gram matrix formulation, whose computational and storage requirements can grow rapidly with the size of training data. A finite dimensional approximation for non-linear PSRs was proposed in [6]. However, it can be thought of as an approximation of HSE-HMMs [25] with actions, which has poor theoretical guarantees [8]. In addition, [6] does not

provide examples on how to apply the proposed model in controlled processes with continuous actions. In contrast, the model we propose is an approximation of HSE-PSRs, which is a more principled generalization of PSRs as it performs true Bayesian inference in the RKHS.

In this work, we use a reduction of dynamical system learning to supervised regression. While similar reductions were implicit in the system identification literature [28], there have recently been more explicit reductions that attempt to gain advantages such as using flexible and/or online regression models [19, 16, 6, 29, 27]. These reductions, however, assume uncontrolled systems, where future observation statistics constitute an unbiased representation of the predictive state. Modeling controlled systems is more subtle since the the state of the system is a *conditional distribution* of observations given actions.

Another related work is the spectral learning algorithm for POMDPs proposed in [2]. This method uses tensor factorization to recover POMDP parameters from examples collected by a non-blind memoryless policy. This method is limited to discrete POMDPs since it requires solving a tensor decomposition problem for each possible action. In addition, PSRs have more representational capacity than POMDPs and are able to compactly represent more sophisticated systems [23].

It is worth mentioning that there are other classes of dynamical system learning algorithms that are based on local optimization or sampling approaches [11, 12]. These algorithms, however, do not offer consistency guarantees.

3 Formulation

We define a class of models that extend predictive state models of [16] to controlled systems.

3.1 Notation

We first introduce some notation: We denote by $\Pr[x \mid \text{do}(Y = y)]$ the probability of x given that we *intervene* by setting Y to y . This is different from $\Pr[x \mid Y = y]$

which denotes conditioning on *observing* $Y = y$; in the former case, we ignore all effects on Y by other variables. We denote by $V_{A|B;c}$ the linear operator that satisfies

$$\mathbb{E}[A|B = b, C = c] = V_{A|B;c}b \quad \forall b, c$$

In other words for each c , $V_{A|B;c}$ is a conditional expectation operator from B to A (e.g. a conditional probability table).

When dealing with multiple variables, we will use tensor notation e.g. $W_{A,B|C,D}$ is a 4-mode tensor. We will use

$$W_{A,B|C,D} \times_C c \times_D d$$

to denote multiplying $W_{A,B|C,D}$ by c along the mode corresponding to C and by d along the mode corresponding to D . If c is a matrix then the multiplication is performed along the first dimension of c .

We will also use $\|\cdot\|_F$ to denote Frobenius norm, $a \otimes b$ to denote Kronecker product of two vectors and $A \star B$ to denote the Khatri-Rao product of two matrices (columnwise Kronecker product).

3.2 Model Definition

We will consider k -observable systems, where the posterior belief state given all previous observations and actions is uniquely identified by the conditional distribution $\Pr[o_{t:t+k-1} \mid \text{do}(a_{t:t+k-1})]$.

Following [16], we denote by ψ_t^o , ψ_t^a , ξ_t^o and ξ_t^a sufficient features of future observations $o_{t:t+k-1}$, future actions $a_{t:t+k-1}$, extended future observations $o_{t:t+k}$ and extended future actions $a_{t:t+k}$ at time t respectively.

We also use $h_t^\infty \equiv o_{1:t-1}, a_{1:t-1}$ to denote the entire history of observations and actions at time t and use $h_t \equiv h(o_{1:t-1}, a_{1:t-1})$ to denote finite features of previous observations and actions before time t ³.

We are now ready to define the class of systems we are interested in.

Definition 1. A dynamical system is said to conform to a *predictive state controlled model (PSCM)* if it satisfies the following properties:

- For each time t , there exists a linear operator $Q_t = V_{\psi_t^o | \text{do}(\psi_t^a); h_t^\infty}$ (referred to as *predictive state*) such that $\mathbb{E}[\psi_t^o \mid \text{do}(\psi_t^a), h_t^\infty] = Q_t \psi_t^a$
- For each time t , there exists a linear operator $P_t = V_{\xi_t^o | \text{do}(\xi_t^a); h_t^\infty}$ (referred to as *extended state*) such that $\mathbb{E}[\xi_t^o \mid \text{do}(\xi_t^a), h_t^\infty] = P_t \xi_t^a$

²Action features are sufficient if adding more features does not change the conditional probability of future observation features.

³Often but not always, h_t is a computed from fixed-size window of previous observations and actions ending at $t - 1$.

- There exists a linear map W such that, for each time t ,

$$P_t = W(Q_t) \quad (1)$$

- There exists a filtering function f_{filter} such that, for each time t , $Q_{t+1} = f_{\text{filter}}(P_t, o_t, a_t)$. f_{filter} is typically non-linear but known in advance.

It follows that a PSCM is specified by the tuple $(Q_0, W, f_{\text{filter}})$, where Q_0 denotes the initial belief state.

There are a number of aspects of PSCMs that warrant discussion. First, unlike latent state models, the state Q_t is represented by a conditional distribution of observed quantities. Second, Q_t is a deterministic function of the history h_t^∞ . It represents the *belief* state that one should maintain after observing the history to make optimal predictions. Third, a PSCM specifies a recursive filter where given an action a_t and an observation o_t , the state update equation is given by

$$Q_{t+1} = f_{\text{filter}}(W(Q_t), o_t, a_t) \quad (2)$$

This construction allows us to learn a linear map W and use it to build models with non-linear state updates, including IO-HMMs [4], Kalman filters with inputs [28] and HSE-PSRs [8]⁴. As we see in Section 4, avoiding latent variables and having a linear W enable the formulation of a consistent learning algorithm.

4 Learning A Predictive State Controlled Model

We assume that the extended features ξ_t^o and ξ_t^a are chosen such that f_{filter} is known. The parameters to learn are thus W and Q_0 .

For this work, we assume that a fixed blind (open-loop) policy is used to collect training data, which means that we can treat causal conditioning on action $\text{do}(a_t)$ as ordinary conditioning on a_t .⁵ It is possible, however, that a different (possibly non-blind) policy is used at test time.

To learn model parameters, we will adapt the two-stage regression method of [16]. Let $\bar{Q}_t \equiv \mathbb{E}[Q_t \mid h_t]$ (resp. $\bar{P}_t \equiv \mathbb{E}[P_t \mid h_t]$) be the expected state (resp. expected extended state) conditioned on finite history features h_t . For brevity, we might refer to $\bar{Q}_t$ simply as the (predictive)

⁴We discuss HSE-PSRs in more detail in Section 5. We defer a more detailed discussion of Kalman filters and IO-HMMs to the supplementary material.

⁵One way to deal with non-blind training policies is to assign importance weight to training examples to correct the bias resulting from non-blindness [10, 9]. This, however, requires knowledge of the data collection policy and can result in a high variance of the estimated parameters. We defer the case of unknown non-blind policy to future work.

state when the distinction from Q_t is clear. It follows from linearity of expectation that $\mathbb{E}[\psi_t^o \mid \psi_t^a, h_t] = \bar{Q}_t \psi_t^a$ and $\mathbb{E}[\xi_t^o \mid \xi_t^a, h_t] = \bar{P}_t \xi_t^a$ and it also follows from the linearity of W that

$$\bar{P}_t = W(\bar{Q}_t)$$

So, we train regression models (referred to S1 regression models) to estimate $\bar{Q}_t$ and $\bar{P}_t$ from h_t . Then, we train another (S2) regression model to estimate W from $\bar{Q}_t$ and $\bar{P}_t$.

Being conditional distributions, estimating $\bar{Q}_t$ and $\bar{P}_t$ from h_t is more subtle compared to uncontrolled systems, since we cannot use observation features as estimates of the state. We describe two methods to construct an S1 regression model to estimate $\bar{Q}_t$. The same methods apply to $\bar{P}_t$. As we show below, instances of both methods exist in the literature of system identification.

4.1 Joint S1 Approach

Let ψ_t^{oa} denote a sufficient statistic of the joint observation/action distribution $\Pr(\psi_t^o, \psi_t^a \mid h_t)$. This distribution is fixed for each value of h_t since we assume a fixed model and policy. We use an S1 regression model to learn the map $f : h_t \mapsto \mathbb{E}[\psi_t^{oa} \mid h]$ by solving the optimization problem

$$\arg \min_{f \in \mathcal{F}} \sum_{t=1}^T l(f(h_t), \psi_t^{oa}) + R(f)$$

for some suitable Bregman divergence loss l (e.g. square loss) and regularization R .

Once we learn f , we can estimate $\bar{Q}_t$ by first estimating the joint distribution $\Pr(\psi_t^o, \psi_t^a \mid h_t)$ and then deriving the conditional operator $\bar{Q}_t$. By the continuous mapping theorem, a consistent estimator of f results in a consistent estimator of $\bar{Q}_t$. An example of applying this method is using kernel Bayes rule [13] to estimate states in HSE-PSR [8].

4.2 Conditional S1 Approach

In this method, instead of estimating the joint distribution represented by $\mathbb{E}[\psi_t^{oa} \mid h_t]$, we directly estimate the conditional distribution $\bar{Q}_t$. We exploit the fact that each training example ψ_t^o is an unbiased estimate of $\bar{Q}_t \psi_t^a = \mathbb{E}[\psi_t^o \mid \psi_t^a, h_t]$. We can formulate the S1 regression problem as learning a function $f : h_t \mapsto \bar{Q}_t$ that best matches the training examples. i.e. we solve the problem

$$\arg \min_{f \in \mathcal{F}} \sum_{t=1}^T l(f(h_t) \psi_t^a, \psi_t^o) + R(f) \quad (3)$$

for some suitable Bregman divergence loss l (e.g. square loss) and regularization R . An example of applying this method is the oblique projection method used in spectral

system identification [28]. It is worth emphasizing that both the joint and conditional S1 approaches assume the state to be a *conditional* distribution. They only differ in the way to estimate that distribution. We discuss their advantages and disadvantages in the context of RFF-PSR in Section 5.3.

4.3 S2 Regression and Learning Algorithm

Given S1 regression models to estimate $\bar{Q}_t$ and $\bar{P}_t$, learning a controlled dynamical system proceeds as shown in Algorithm 1.

Algorithm 1 Two-stage regression for predictive state controlled models

Input: $\psi_{n,t}^o, \psi_{n,t}^a, \xi_{n,t}^o, \xi_{n,t}^a$ for $1 \leq n \leq N, 1 \leq t \leq T_n$ (N is the number of trajectories, T_n is the length of n^{th} trajectory)

Output: Dynamics matrix $\hat{W}$ and initial state $\hat{Q}_0$

Use S1A regression to estimate $\bar{Q}_{n,t}$.

Use S1B regression to estimate $\bar{P}_{n,t}$.

Let $\hat{W}$ be the (regularized) least square solution to the system of equations

$$\bar{P}_{n,t} \approx W(\bar{Q}_{n,t}) \quad \forall n, t$$

if N is sufficiently large **then**

Let $\bar{Q}_0$ be the (regularized) least square solution to the system of equations $\psi_{n,1}^o \approx \bar{Q}_0 \psi_{n,1}^a \quad \forall n$

else

Set $\hat{Q}_0$ to the average of $\bar{Q}_{n,t}$

end if

It is worth noting that Algorithm 1 is still an instance of the two stage regression framework described in [16] and hence it retains its theoretical guarantees; mainly that we can bound the error in estimating the dynamics matrix W in terms of S1 regression error bounds, assuming that we collect examples from the stationary distribution of some blind policy ⁶.

5 Predictive State Controlled Models With Random Fourier Features

Having a general framework for learning controlled dynamical systems, we now focus on HSE-PSR[8] as a non-parametric instance of that framework using Hilbert space embedding of distributions. We first describe HSE-PSR learning as a two-stage regression method. Then we demonstrate how to obtain a finite dimensional approximation using random Fourier features (RFF)[20]. Before describing HSE-PSR we give some necessary background on Hilbert space embedding and random Fourier features.

⁶This theoretical guarantee applies to any blind policy. However, to obtain low S1 regression errors, a good exploration policy is needed

5.1 Hilbert Space Embedding of Distributions

We will briefly describe the concept of Hilbert space embedding of distributions. We refer the reader to [24] for more details on this topic.

Let $\mathcal{X}$ be an RKHS equipped with an inner product $\langle \cdot, \cdot \rangle_{\mathcal{X}}$. Let $\mathcal{I}_{\mathcal{X}}$ be an index set where there exist a feature map $\phi_{\mathcal{X}} : \mathcal{I}_{\mathcal{X}} \mapsto \mathcal{X}$ and a kernel $k_{\mathcal{X}} : \mathcal{I}_{\mathcal{X}} \otimes \mathcal{I}_{\mathcal{X}} \mapsto \mathbb{R}$ such that $k_{\mathcal{X}}(x_1, x_2) = \langle \phi_{\mathcal{X}}(x_1), \phi_{\mathcal{X}}(x_2) \rangle_{\mathcal{X}}$.

Let $X \in \mathcal{I}_{\mathcal{X}}$ be a random variable. The mean map $\mu_X \in \mathcal{X}$ is defined as $\mathbb{E}[\phi_{\mathcal{X}}(X)]$. For any $f \in \mathcal{X}$, the mean map satisfies

$$\mathbb{E}[f(X)] = \langle f, \mu_X \rangle_{\mathcal{X}}$$

If $k_{\mathcal{X}}$ is universal, such as a Gaussian kernel over a compact set, the mean map is an injective function of the probability distribution over $\mathcal{X}$. This allows for treating probability distributions as elements in a vector space, without assuming a parametric form.

The mean map is analogous to a mean vector in finite dimensional spaces, since we are interested in regression, we need to define the analog of the covariance matrix, which is the covariance operator. Let $\mathcal{Y}, \mathcal{Z}$ be other RKHSs. The uncentered covariance operator of two variables $X \in \mathcal{I}_{\mathcal{X}}$ and $Y \in \mathcal{I}_{\mathcal{Y}}$ is a linear operator C_{XY} that satisfies

$$\langle f, C_{XY}g \rangle = \mathbb{E}[f(X)g(Y)] \quad \forall f \in \mathcal{X}, g \in \mathcal{Y},$$

which is given by

$$C_{XY} = \mathbb{E}[\phi_{\mathcal{X}}(X) \otimes \phi_{\mathcal{Y}}(Y)]$$

For universal kernels $k_{\mathcal{X}}$ and $k_{\mathcal{Y}}$, C_{XY} is a sufficient representation of the joint distribution $\Pr(X, Y)$. Throughout this paper, we will use $C_{XY|z}$ to denote the covariance of X and Y given that $Z = z$. To be precise, it satisfies

$$\begin{aligned} \langle f, C_{XY|z}g \rangle &= \mathbb{E}[f(X)g(Y) \mid Z = z] \\ \forall f \in \mathcal{X}, g \in \mathcal{Y}, z \in \mathcal{Z} \end{aligned}$$

Under smoothness assumptions, it is known that [26]

$$V_{\phi_{\mathcal{X}}(X)|\phi_{\mathcal{Y}}(Y)} = C_{XY}C_{XX}^{-1},$$

where W is as defined in Section 3. More generally,

$$V_{\phi_{\mathcal{X}}(X)|\phi_{\mathcal{Y}}(Y);z} = C_{XY|z}C_{XX|z}^{-1}$$

In practice, we deal with estimated covariances and hence we use regularization:

$$V_{\phi_{\mathcal{X}}(X)|\phi_{\mathcal{Y}}(Y);z} = \hat{C}_{XY|z}(\hat{C}_{XX|z} + \lambda I)^{-1}$$

It is illustrative to map the aforementioned concepts to the special case where $\mathcal{I}_{\mathcal{X}}$ and $\mathcal{I}_{\mathcal{Y}}$ are finite and the kernel of

choice is the delta kernel $k_{\delta}(x_1, x_2) \equiv 1(x_1 = x_2)$. In this case the feature vector ϕ is an indicator vector, the mean map μ_X is the marginal probability table of X , the covariance operator C_{XY} is the joint probability table of X and Y , and $V_{\phi_{\mathcal{X}}(X)|\phi_{\mathcal{Y}}(Y)}$ is the conditional probability table of X given Y .

5.2 HSE-PSR as a predictive state controlled model

HSE-PSR is a generalization of IO-HMM that has proven to be successful in practice [8, 5]. It is suitable for high dimensional and continuous observations and/or actions. HSE-PSR uses kernel feature maps as sufficient statistics of observations and actions. We define four kernels k_O, k_A, k_o, k_a over future observation features, future action features, individual observations and individual actions respectively.

We can then define $\psi_t^o = \phi_O(o_{t:t+k-1})$ and similarly $\psi_t^a = \phi_A(a_{t:t+k-1})$. We will also use ϕ_t^o and ϕ_t^a as shorthands for $\phi_o(o_t)$ and $\phi_a(a_t)$. The extended future is then defined as $\xi_t^o = \psi_t^o \otimes \phi_t^o$ and $\xi_t^a = \psi_t^a \otimes \phi_t^a$.

Under the assumption of a blind learning policy, the operators Q_t and P_t are defined to be

$$Q_t = V_{\psi_t^o|\psi_t^a;h_t^\infty} \quad (4)$$

$$P_t = (P_t^\xi, P_t^o) = (V_{\psi_{t+1}^o \otimes \phi_t^o|\psi_{t+1}^a \otimes \phi_t^a;h_t^\infty}, V_{\phi_t^o \otimes \phi_t^o|\phi_t^a;h_t^\infty}) \quad (5)$$

Therefore, Q_t specifies the state of the system as a conditional distribution of future observations given future actions while P_t is a tuple of two operators that allow us to condition on the pair (a_t, o_t) to obtain Q_{t+1} . In more detail, filtering in an HSE-PSR is carried out as follows

- From o_t and a_t , obtain ϕ_t^o and ϕ_t^a .
- Compute $C_{o_t o_t|h_t^\infty, a_t} = V_{\phi_t^o \otimes \phi_t^o|\phi_t^a;h_t^\infty} \phi_t^a$
- Multiply by inverse observation covariance to change “predicting ϕ_t^o ” into “conditioning on ϕ_t^o ”:

$$\begin{aligned} &V_{\psi_{t+1}^o|\psi_{t+1}^a, \phi_t^o, \phi_t^a;h_t^\infty} \\ &= V_{\psi_{t+1}^o \otimes \phi_t^o|\psi_{t+1}^a, \phi_t^a;h_t^\infty} \times \phi_t^o (C_{o_t o_t|h_t^\infty, a_t} + \lambda I)^{-1} \end{aligned}$$

- Condition on ϕ_t^o and ϕ_t^a to obtain shifted state

$$\begin{aligned} Q_{t+1} &\equiv V_{\psi_{t+1}^o|\psi_{t+1}^a, \phi_t^o, \phi_t^a;h_t^\infty} \\ &= V_{\psi_{t+1}^o|\psi_{t+1}^a;h_t^\infty} \times \phi_t^o \phi_t^a \times \phi_t^a \phi_t^o \end{aligned}$$

Thus, in HSE-PSR, the parameter W is composed of two linear maps; f_o and f_ξ such that

$$P_t^\xi = f_\xi(Q_t), P_t^o = f_o(Q_t)$$

In the following section we show how to estimate $\bar{Q}_t$ and $\bar{P}_t$ from data. Estimation of f_ξ, f_o can then be carried out using kernel regression.

Learning and filtering in an HSE-PSR can be implicitly carried out in RKHS using a Gram matrix formulation. We will describe learning in terms of RKHS elements and refer the reader to [8] for details on the Gram matrix formulation.

5.3 S1 Regression for HSE-PSR

As discussed in section 4 we can use a joint or conditional approach for S1 regression. We now demonstrate how these two approaches apply to HSE-PSR.

Joint S1 Regression for HSE-PSR

This is the method used in [8]. In this approach we exploit the fact that

$$\bar{Q}_t = W_{\psi_t^o | \psi_t^a; h_t} = C_{\psi_t^o \psi_t^a | h_t} (C_{\psi_t^a \psi_t^a | h_t} + \lambda I)^{-1}$$

So, we learn two linear maps T_{oa} and T_a such that $T_{oa}(h_t) \approx C_{\psi_t^o \psi_t^a | h_t}$ and $T_a(h_t) \approx C_{\psi_t^a \psi_t^a | h_t}$. The training examples for T_{oa} and T_a consist of pairs $(h_t, \psi_t^o \otimes \psi_t^a)$ and $(h_t, \psi_t^a \otimes \psi_t^a)$ respectively.

Once we learn this map, we can estimate $C_{\psi_t^o \psi_t^a | h_t}$ and $C_{\psi_t^a \psi_t^a | h_t}$ and consequently estimate $\bar{Q}_t$.

Conditional S1 Regression for HSE-PSR

It is also possible to apply the conditional S1 regression formulation in Section 4.2. Specifically, let $\mathcal{F}$ be the set of 3-mode tensors, with modes corresponding to ψ_t^o , ψ_t^a and h_t . We estimate a tensor T^* by optimizing

$$T^* = \arg \min_{T \in \mathcal{F}} \|(T \times_{h_t} h_t \times_{\psi_t^a} \psi_t^a) - \psi_t^o\|^2 + \lambda \|T\|_{HS}^2,$$

where $\|\cdot\|_{HS}^2$ is the Hilbert-Schmidt norm, which translates to Frobenius norm in finite-dimensional Euclidan spaces. We can then use

$$\bar{Q}_t = T^* \times_{h_t} h_t$$

For both regression approaches, the same procedure can be used to estimate the extended state $\bar{P}_t$ by replacing features ψ_t^o and ψ_t^a with their extended counterparts ξ_t^o and ξ_t^a .

It is worth noting that the joint and conditional approaches offer complementary advantages: the joint approach requires inverting an estimated matrix $C_{\psi_t^a \psi_t^a | h_t}$ to obtain $\bar{Q}_t$, which results in a high computational cost as well as potential numerical issues. On the other hand, it can be shown that the error bound in estimating regression weights is proportional to the square root of the number of inputs and the logarithm of the number of the outputs (due to union bound). For high dimensional features, the conditional approaches solves a regression problem with a quadratic number of inputs, resulting in a potentially high error. For this reason, we compare both approaches in our experiments.

5.4 Approximating HSE-PSR with Random Fourier Features

A Gram matrix formulation of the HSE-PSR has computational and memory requirements that grow rapidly with the number of training examples. To alleviate this problem, we resort to kernel approximation—that is, we replace RKHS vectors such as ψ_t^o and ψ_t^a with finite dimensional vectors that approximately preserve inner products. We use random Fourier features (RFF) [20] as an approximation but it is possible to use other approximation methods.

One issue with RFF approximation, however, is that the dimension of the RFF vectors needed to reasonably approximate RKHS vectors could be in the order of thousands. Moreover, if D is the dimensionality used to represent ψ_t^o , ψ_t^a , ϕ_t^o and ϕ_t^a , then ξ_t^o and $\bar{Q}_t$ each occupies D^2 space and each S1 weight tensor requires D^3 space, making a direct application of RFF approximation impractical. To mitigate this problem, we apply principal component analysis (PCA) to the feature maps to reduce their dimension to $p \ll 2D$. In addition, we apply PCA again to quantities that require p^2 space such as extended features ξ_t^o , ξ_t^a and states $\bar{Q}_t$, reducing them to p -dimensions. We map them back to p^2 dimensions when needed (e.g. for filtering). This results in Algorithm 2. For ease of exposition, we assume that RFF features are computed prior to PCA. In our implementation, we compute the RFF features on the fly while performing PCA to reduce the required memory footprint. We also employ randomized SVD [15] for fast computation of PCA. Algorithm 2 scales linearly with N and D . The dependency on p is determined by the implementation of regression steps. A reasonable implementation (e.g. using conjugate gradient) would result in overall time complexity of $O(p^3 N + p D N)$ and space complexity of $O(p^2 N + D p + p^3)$.

5.5 Model refinement by local optimization

A common practice is to use the output of a moment-based algorithm to initialize a non-convex optimization algorithm such as EM [3] or gradient descent [18]. Since EM is not directly applicable to RFF-PSR, we propose a gradient descent approach. We can observe that filtering in an RFF-PSR defines a recurrent structure given by.

$$q_{t+1} = f_{\text{filter}}(W q_t, o_t, a_t) \\ \mathbb{E}[o_t | q_t] = W_{\text{pred}}(q_t \otimes \phi(a_t)),$$

where W_{pred} is a linear operator that predicts the next observation. The linearity of W_{pred} is based on the assumption that the closure of the RKHS contains the functions $f_{i,j}$ where $f_{i,j}(o_{t:t+k-1})$ is the j^{th} coordinate of o_{t+i} , which is true for a universal kernel.

If f_{filter} is differentiable, then we can improve our estimates of W and W_{pred} using backpropagation through time

Algorithm 2 Learning Predictive State Representation with Random Fourier Features (LEARN-RFF-PSR)

Input: Matrices Φ^h, Φ^o, Φ^a of history, observation and action features (each column corresponds to a time step). Matrices $\Psi^o, \Psi^a, \Psi^{o'}, \Psi^{a'}$ of test observations, test actions, shifted test observations and shifted test actions.

Output: S2 regression weights $\hat{W}_\xi$ and $\hat{W}_o$.

Subroutines:

SVD(X, p), returns the tuple $(U, U^\top X)$, where U consists of top p singular vectors of X .

{Feature projection using PCA}

$U^h, \Phi^h \leftarrow \text{SVD}(\Phi^h, p);$
 $U^o, \Phi^o \leftarrow \text{SVD}(\Phi^o, p); U^a, \Phi^a \leftarrow \text{SVD}(\Phi^a, p);$
 $U_\psi^o, \Psi^o \leftarrow \text{SVD}(\Psi^o, p); U_\psi^a, \Psi^a \leftarrow \text{SVD}(\Psi^a, p);$
 $U_\xi^o, \Xi^o \leftarrow \text{SVD}((U_\psi^o)^\top \Psi^{o'}) \star \Phi^o, p);$
 $U_\xi^a, \Xi^a \leftarrow \text{SVD}(\Phi^a \star (U_\psi^a)^\top \Psi^{a'}), p);$
 $U^{oo}, \Phi^{oo} \leftarrow \text{SVD}(\Phi^o \star \Phi^o, p)$

{S1 Regression and State Projection}

Estimate $\bar{Q}_t, \bar{P}_t^\xi, \bar{P}_t^o$ for each time t using the one of the S1 methods in 5.3.

Reshape $\bar{Q}_t, \bar{P}_t$ as column vectors for each t and then stack the resulting vectors in matrices $\mathbf{Q}, \mathbf{P}^\xi$ and $\mathbf{P}^o$.

$U^q, \mathbf{Q} \leftarrow \text{SVD}(\mathbf{Q}, p)$

{S2 Regression}

$\hat{W}_\xi \leftarrow \arg \min_{W \in \mathbb{R}^{p^2 \times p}} \|\mathbf{P}^\xi - W\mathbf{Q}\|^2 + \lambda_2 \|W\|_F^2$
 $\hat{W}_o \leftarrow \arg \min_{W \in \mathbb{R}^{p^2 \times p}} \|\mathbf{P}^o - W\mathbf{Q}\|^2 + \lambda_2 \|W\|_F^2$

[30] (BPTT). It is possible to optimize the error in predicting (features of) a window of observations. In our experiments, we learn to predict $o_{t:t+k-1}$ given $a_{t:t+k-1}$.

6 Experiments

6.1 Synthetic Data

We test the proposed model on a benchmark synthetic non-linear system [8]:

$$\begin{aligned} \dot{x}_1(t) &= x_2(t) - 0.1 \cos(x_1(t))(5x_1(t) - 4x_1^3(t) + x_1^5(t)) \\ &\quad - 0.5 \cos(x_1(t))a(t), \\ \dot{x}_2(t) &= -65x_1(t) + 50x_1^3(t) - 15x_1^5(t) - x_2(t) - 100a(t), \\ o(t) &= x_1(t) \end{aligned}$$

The input a is generated as zero-order hold white noise, uniformly distributed between -0.5 and 0.5. We collected 20 trajectories of 100 observations and actions at 20Hz and we split them into 10 training, 5 validation and 5 test trajectories. The prediction target for this experiment is $o(t)$.

6.2 Predicting the nose position of a simulated swimmer robot

We consider the 3-link simulated swimmer robot from the open-source package RLPy [14]. The 2-d action consists of torques applied on the two joints of the links. The observation model returns the angles of the joints and the position of the nose (in body coordinates). The measurements are contaminated with Gaussian noise whose standard deviation is 5% of the true signal standard deviation. To collect the data, we use an open-loop policy that selects actions uniformly at random. We collected 25 trajectories of length 100 each and use 24 for training and 1 for validation. We generate test trajectories using a mixed policy: with probability p_{blind} , we sample a uniformly random action, while with probability $1 - p_{\text{blind}}$, we sample an action from a pre-specified deterministic policy that seeks a goal point. We generate two sets of 10 test trajectories each, one with $p_{\text{blind}} = 0.8$ and another with $p_{\text{blind}} = 0.2$. The prediction target for this experiment is the position of the nose.

6.3 Tested Methods and Evaluation Procedure

We tested three different initializations of RFF-PSR (with RBF kernel): random initialization, two-stage regression with joint S1, and two-stage regression with conditional S1 (Section 5.3). For each initialization, we tested the model before and after refinement. For refinement we used BPTT with a decreasing step size: the step size is reduced by half if validation error increases. Early stopping occurs if the step size becomes too small (10^{-5}) or the relative change in validation is insignificant (10^{-3}). We also test the following baselines.

HSE-PSR: We implemented the Gram matrix formulation of HSE-PSR as described in [8].

N4SID: We used MATLAB's implementation of subspace identification of linear dynamical systems [28].

Non-linear Auto Regression with Exogenous Inputs (RFF-ARX)

We implemented a version of auto regression where the predictor variable is the RFF representation of future actions together with a finite history of previous observations and actions, and the target variable is future observations.

Models were trained with a predictive state of 10 future observations and a history of 20 past observations. For RFF-PSR and RFF-ARX we used 10000 RFF features and applied PCA to project features onto 20 dimensions. Kernel bandwidths were set to the median of the distance between training points (median trick). For evaluation, we perform filtering on the data and estimate the prediction target of the experiment at test time t given the history $o_{1:t-H}, a_{1:t}$, where H is the prediction horizon. We report the mean square error across all times t for each value of $H \in \{1, 2, \dots, 10\}$.

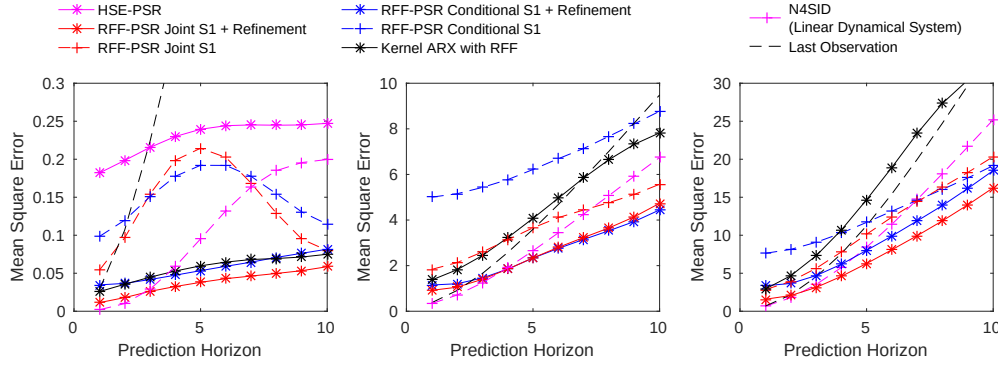


Figure 1: Mean square error for 10-step prediction on synthetic model (left) swimming robot simulation with 80% blind test-policy (middle) and swimming robot with 20% blind test policy (right). Baselines with very high MSE are not shown for clarity. A comparison with HSE-PSR on the swimmer dataset was not possible as it required prohibitively large memory.

6.4 Results and Discussion

The results are shown in Figure 1. We omit the results for randomly initialized RFF-PSR as they were significantly worse. There are a number of important observations.

- In general, joint S1 training closely matches or outperforms conditional S1 training, both with and without refinement. This suggests that we are in a situation where the benefit of avoiding a p^2 to p regression problem in S1 outweighs the possible bias from inverting action covariance matrices.
- Refinement by local training significantly improves predictive performance for all initialization methods.
- Model refinement, on its own, is not sufficient to produce a good model. The two stage regression provides a good initialization of the refinement procedure.
- Even without refinement, RFF-PSR matches or outperforms HSE-PSR. This is remarkable since RFF-PSR requires less computation and memory.
- In the synthetic experiment, non-refined RFF-PSR is giving poor mid-range predictions. We conjecture that short-range predictions are easier as they largely depend on the previous observations, and long-range predictions are also easier because they largely depend on the sequence of actions. However, refinement was able to produce a model that performs well at all prediction horizons.
- Compared to other methods, RFF-PSR has better performance with non-blind test policies.

7 Conclusion

We proposed a framework to learn controlled dynamical systems using two-stage regression. We then applied this framework to develop a scalable method for controlled non-linear system identification: using RFF approximation of HSE-PSR together with a refinement procedure to en-

hance the model after a two-stage regression initialization. We have demonstrated promising results for the proposed method in terms of predictive performance. As future work, we would like to go beyond predicting observations, by using this framework for planning, imitation learning and reinforcement learning.

References

- [1] Animashree Anandkumar, Rong Ge, Daniel Hsu, Sham M. Kakade, and Matus Telgarsky. Tensor decompositions for learning latent variable models. *J. Mach. Learn. Res.*, 2014.
- [2] Kamyar Azizzadenesheli, Alessandro Lazaric, and Animashree Anandkumar. Reinforcement learning of pomdp’s using spectral methods. *CoRR*, abs/1602.07764, 2016.
- [3] David Belanger and Sham M. Kakade. A linear dynamical system model for text. In *ICML*, 2015.
- [4] Y. Bengio and P. Frasconi. An input output HMM architecture. In *NIPS*, 1995.
- [5] Byron Boots and Dieter Fox. Learning dynamic policies from demonstration. *NIPS Workshop on Advances in Machine Learning for Sensorimotor Control*, 2013.
- [6] Byron Boots and Geoffrey Gordon. An online spectral learning algorithm for partially observable non-linear dynamical systems. In *AAAI*, 2011.
- [7] Byron Boots and Geoffrey J Gordon. Predictive state temporal difference learning. In *NIPS*. 2010.
- [8] Byron Boots, Arthur Gretton, and Geoffrey J. Gordon. Hilbert Space Embeddings of Predictive State Representations. In *UAI*, 2013.

- [9] Byron Boots, Sajid Siddiqi, and Geoffrey Gordon. Closing the learning planning loop with predictive state representations. In *I. J. Robotic Research*, volume 30, pages 954–956, 2011.
- [10] Michael Bowling, Peter McCracken, Michael James, James Neufeld, and Dana Wilkinson. Learning predictive state representations using non-blind policies. In *ICML*, 2006.
- [11] Emily Fox, Erik B. Sudderth, Michael I. Jordan, and Alan S. Willsky. Nonparametric bayesian learning of switching linear dynamical systems. In D. Koller, D. Schuurmans, Y. Bengio, and L. Bottou, editors, *Advances in Neural Information Processing Systems 21*, pages 457–464. Curran Associates, Inc., 2009.
- [12] Roger Frigola, Fredrik Lindsten, Thomas B. Schön, and Carl Edward Rasmussen. Bayesian inference and learning in gaussian process state-space models with particle mcmc. In C. J. C. Burges, L. Bottou, M. Welling, Z. Ghahramani, and K. Q. Weinberger, editors, *Advances in Neural Information Processing Systems 26*, pages 3156–3164. Curran Associates, Inc., 2013.
- [13] Kenji Fukumizu, Le Song, and Arthur Gretton. Kernel bayes’ rule: Bayesian inference with positive definite kernels. *Journal of Machine Learning Research*, 14(1), 2013.
- [14] Alborz Geramifard, Robert H Klein, Christoph Dann, William Dabney, and Jonathan P How. RLPy: The Reinforcement Learning Library for Education and Research. <http://acl.mit.edu/RLPy>, 2013.
- [15] N. Halko, P. G. Martinsson, and J. A. Tropp. Finding structure with randomness: Probabilistic algorithms for constructing approximate matrix decompositions. *SIAM Rev.*, 2011.
- [16] Ahmed Hefny, Carlton Downey, and Geoffrey J Gordon. Supervised learning for dynamical system learning. In *NIPS*. 2015.
- [17] Daniel Hsu, Sham M. Kakade, and Tong Zhang. A spectral algorithm for learning hidden markov models. In *COLT*, 2009.
- [18] Nan Jiang, Alex Kulesza, and Satinder P. Singh. Improving predictive state representations via gradient descent. In *AAAI*, 2016.
- [19] John Langford, Ruslan Salakhutdinov, and Tong Zhang. Learning nonlinear dynamic models. In *ICML*, 2009.
- [20] Ali Rahimi and Benjamin Recht. Random features for large-scale kernel machines. In *NIPS*. 2008.
- [21] Matthew Rosencrantz and Geoff Gordon. Learning low dimensional predictive representations. In *ICML*, pages 695–702, 2004.
- [22] Sajid Siddiqi, Byron Boots, and Geoffrey J. Gordon. Reduced-rank hidden Markov models. In *AISTATS*, 2010.
- [23] Satinder Singh, Michael R. James, and Matthew R. Rudary. Predictive state representations: A new theory for modeling dynamical systems. In *UAI*, 2004.
- [24] Alex Smola, Arthur Gretton, Le Song, and Bernhard Schölkopf. A hilbert space embedding for distributions. In *In Algorithmic Learning Theory: 18th International Conference*, 2007.
- [25] L. Song, B. Boots, S. M. Siddiqi, G. J. Gordon, and A. J. Smola. Hilbert space embeddings of hidden Markov models. In *ICML*, 2010.
- [26] Le Song, Jonathan Huang, Alexander J. Smola, and Kenji Fukumizu. Hilbert space embeddings of conditional distributions with applications to dynamical systems. In *ICML*, 2009.
- [27] Wen Sun, Arun Venkatraman, Byron Boots, and J. Andrew Bagnell. Learning to filter with predictive state inference machines. In *Proceedings of the 2016 International Conference on Machine Learning (ICML-2016)*, 2016.
- [28] P. van Overschee and L.R. de Moor. *Subspace identification for linear systems: theory, implementation, applications*. Kluwer Academic Publishers, 1996.
- [29] Arun Venkatraman, Wen Sun, Martial Hebert, J. Andrew Bagnell, and Byron Boots. Online instrumental variable regression with applications to online linear system identification. In *AAAI*, 2016.
- [30] Paul J. Werbos. Backpropagation through time: what it does and how to do it. *Proceedings of the IEEE*, 1990.
- [31] Gus Guangyu Xia. *Expressive Collaborative Music Performance via Machine Learning*. PhD thesis, Carnegie Mellon University, 2016.

A Examples of Predictive State Controlled Models

Here we discuss IO-HMM and Kalman filter with inputs, showing that they are instances of PSCMs. We do this for each model by defining the predictive state, showing that it satisfies the condition $P_t = WQ_t$ and describing an S1 regression method.

A.1 IO-HMM

Let T be the transition tensor such that $T \times_s s_t \times_a a_t = \mathbb{E}[s_{t+1}|a_t, s_t]$ and O be the observation tensor such that $O \times_s s_t \times_a a_t = \mathbb{E}[o_t|a_t, s_t]$.

Define O^k to be the extended observation tensor where $O_k \times_s s_t \times_a a_{t:t+k-1} = \mathbb{E}[o_{t:t+k-1}|a_{t:t+k-1}, s_t]$

As a shortcut, we will denote by T_{ij} the product $T \times_s e_i \times_a e_j$.

For $k = 1$, we have $O^1 = O$.

For $k > 1$ we can think of $a_{t:t+k-1}$ as the outer product $a_t \otimes a_{t+1:t+k-1}$. So we can define O^k such that

$$O^k \times_s e_i \times_a (e_j \otimes e_l) = \text{vec}(O_{ij} \otimes (O^{k-1} \times_a e_l \times_s T_{ij})) \quad (6)$$

In words, starting from state e_i and applying an action e_j followed by a sequence of $k - 1$ actions denoted by indicator e_l . The expected indicator of the next k observations is the outer product of expected observation o_t (given by O_{ij}) with the expected indicator of observations $o_{t+1:t+k-1}$ as predicted by O^{k-1} . Note that the two expectations being multiplied are conditionally independent given the state e_i and the action sequence.

Given the tensor O^k the predictive states Q_t and P_t are defined to be

$$\begin{aligned} Q_t &= O^k \times_s s_t \\ P_t &= O^{k+1} \times_s s_t \end{aligned}$$

Now to show that (1) holds, let $\tilde{O}^k$ be a reshaping of O^k into a matrix such that

$$\text{vec}(Q_t) = \tilde{O}^k s_t$$

It follows that

$$P_t = O^{k+1} \times_s s_t = O^{k+1} \times_s ((\tilde{O}^k)^+ \text{vec}(Q_t)),$$

which is linear in Q_t .

S1 Regression

Let $s_t = s(h_t^\infty)$ be the belief state at time t . Note that s_t is a deterministic function of the entire history.

Under a fixed policy assumption, an indicator vector of the joint observation and action assignment is an unbiased estimate of the joint probability table $\mathbb{P}[\psi_t^a, \xi_t^a | h_t^\infty]$. An S1 regression model can be used to learn the mapping $h_t \mapsto \mathbb{P}[\psi_t^a, \xi_t^a | h_t]$. It is then easy to estimate the conditional probability table $\bar{Q}_t$ from the joint probability table $\mathbb{P}[\psi_t^a, \xi_t^a | h_t]$.

We can also use the conditional S1 approach. By exploiting the fact that ψ_t^o is an unbiased estimate of a single column of Q_t corresponding to ψ_t^a . We can use (3) to learn a function $f : h_t \mapsto \bar{Q}_t$ that best matches the training examples.

A.2 Kalman Filter with inputs

The Kalman filter is given by

$$\begin{aligned} x_t &= Ax_{t-1} + Bu_t + \epsilon_t \\ o_t &= Cx_t + \nu_t \end{aligned}$$

Given a belief state $s_t \equiv \mathbb{E}[x_{t-1}|h_t^\infty]$ we can write the predictive state as

$$\mathbb{E}[o_{t:t+k-1} \mid s_t, a_{t:t+k-1}] = \Gamma_k s_t + U_k a_{t:t+k-1},$$

where

$$\Gamma_k = \begin{pmatrix} CA \\ CA^2 \\ \vdots \\ CA^k \end{pmatrix}$$

$$U_k = \begin{pmatrix} B & \mathbf{0} & \dots & \dots & \mathbf{0} \\ AB & B & \mathbf{0} & \dots & \mathbf{0} \\ A^2B & AB & B & \mathbf{0} & \dots & \mathbf{0} \\ & & \vdots & & & \\ A^{k-1}B & \dots & AB & B \end{pmatrix}$$

The extended predictive state have similar form with Γ_k and U_k replaced with Γ_{k+1} and U_{k+1} . Since U is fixed, keeping track of the state amounts to keeping track of $Q_t \equiv \Gamma_k s_t$. It follows that

$$P_t = \Gamma_{k+1} s_t = \Gamma_{k+1} \Gamma_k^+ Q_t = W Q_t$$

If h_t is a linear projection of h_t^∞ (e.g. stacking of a finite window of observations and actions), it can also be shown [28] that

$$\mathbb{E}[Q_t|h_t] = \tilde{\Gamma}_k h_t,$$

for some matrix $\tilde{\Gamma}_k$.

S1 Regression

Let $\mathcal{F}$ be the set of functions that take the form

$$f(h)\psi_t^a = \Gamma h_t + B\psi_t^a$$

The oblique projection method [28] uses linear regression to estimate Γ and B (essentially solving (3)). Having a fixed B , the conditional operator is determined by Γh_t through an affine transformation. Therefore we can use $\bar{Q}_t = \Gamma h_t$.